

MILLFORM AUSTRALIA PRODUCT RANGE



**MILLFORM
AUSTRALIA**

— Established 1972 —



REGIONAL SALES TEAMS
QLD, NSW, ACT, VIC, TAS, WA, NT

**FOR SALES & INFORMATION
ENQUIRIES, CONTACT OUR
KNOWLEDGEABLE TEAM**

T: 1300 645 376

E: enquiries@millform.com.au

W: millform.com.au

Where strength matters

About Millform

With the strength of steel, Millform is dedicated to building a better Australia. We provide quality products, ensure efficient delivery standards, and offer proven solutions for commercial, construction, industrial, and government clients.

Millform provides building products and solutions for diverse industry sectors. We specialise in the engineering and manufacture of quality cold rolled steel products. As an Australian owned and operated company with more than 50 years of experience, we lead from the front with all aspects of product quality, customer support, and efficient delivery. At Millform, we deliver outstanding results through a combination of tailored service delivery and professional attention to detail.

We look forward to meeting your requirements, exceeding your expectations, and helping to make your business more successful.



MILLFORM SYDNEY OFFICE & MANUFACTURING FACILITY



MILLFORM ALBURY OFFICE & MANUFACTURING FACILITY



QUALITY

The quality of our products is the backbone of our business. We invest in the best people and equipment, utilise advanced techniques, and have access to high-quality materials.



AUSTRALIAN BUSINESS

We understand market conditions and respect customer demands. As a large Australian business with local representation, we have the drive and capability to tailor our service delivery.



CUSTOMER SUPPORT

Our customer support is second to none. We believe in clear communication, honest advice, and detailed customer service delivered by a friendly team of experts.



DELIVERY CONTROL

With a combination of our own fleet and trusted contractors, we control the delivery process. As an established Australian business, you can rely on efficient delivery and reliable protection.



**MILLFORM
AUSTRALIA**

Where strength matters



With the strength of steel, Millform is dedicated to building a better Australia. We provide quality products, ensure efficient delivery standards, and offer proven solutions for commercial, construction, industrial, and government clients.

You can find other Millform items on our website.

www.millform.com.au

CONTENTS

PAGE

TopForm™ Top-Hat Purlins	4
FormBatten™ Battens	5
CladForm™ Junction Studs	6
Facade System	11
Trim Angles	12
Archetype Purlin™ C-Section Purlins	14
Archetype Purlin™ Z-Section Purlins	16
Extreme Purlin™ C-Section Purlins	19
Extreme Purlin™ Z-Section Purlins	20
Channels	21
HookFast® Purlin Bridging	23
MillFrame™ Steel Framing	24
CorroForm™ Corrugated Sheet Metal	28
RibForm™ Corrugated Sheet Metal	29
Slab & Spiral Duct (Post Tension Concrete Industry)	30

FOR NON-STANDARD PROFILES – CONTACT OUR SALES TEAM

T: 1300 645 376 E: enquiries@millform.com.au

Top-Hat Purlin




50mm Top-Hat

50 mm TOP HAT - 0.75 BMT: **50TH0.75** (1.09kg/m)

50 mm TOP HAT - 0.95 BMT: **50TH0.95** (1.37kg/m)

50 mm TOP HAT - 1.15 BMT: **50TH1.15** (1.63kg/m)

Standard Pack: 100 Lengths




64mm Top-Hat

64 mm TOP HAT - 0.75 BMT: **64TH0.75** (1.26kg/m)

64 mm TOP HAT - 0.95 BMT: **64TH0.95** (1.58kg/m)

64 mm TOP HAT - 1.15 BMT: **64TH1.15** (1.91kg/m)

Standard Pack: 100 Lengths




75mm Top-Hat

75 mm TOP HAT - 0.75 BMT: **75TH0.75** (1.41kg/m)

75 mm TOP HAT - 0.95 BMT: **75TH0.95** (1.77kg/m)

75 mm TOP HAT - 1.15 BMT: **75TH1.15** (2.14kg/m)

Standard Pack: 100 Lengths




96mm Top-Hat

96 mm TOP HAT - 0.75 BMT: **96TH0.75** (1.74kg/m)

96 mm TOP HAT - 0.95 BMT: **96TH0.95** (2.19kg/m)

96 mm TOP HAT - 1.15 BMT: **96TH1.15** (2.65kg/m)

Standard Pack: 100 Lengths

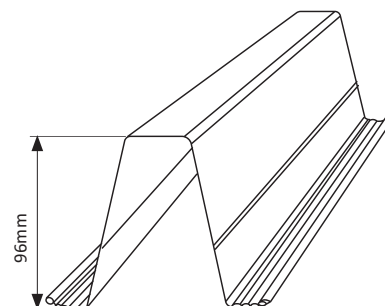


120mm Top-Hat

120 mm TOP HAT - 0.75 BMT: **120TH0.75** (2.17kg/m)

120 mm TOP HAT - 0.95 BMT: **120TH0.95** (2.73kg/m)

120 mm TOP HAT - 1.15 BMT: **120TH1.15** (3.30kg/m)

Standard Pack: 100 Lengths

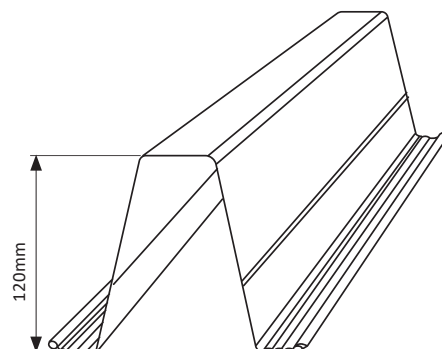

Where strength matters






Battens

22mm Ceiling Batten

22 mm CEILING BATTEN - 0.42 BMT - ALUZINC: **22CB0.42Z** (0.36kg/m)

22 mm CEILING BATTEN - 0.75 BMT - ALUZINC: **22CB0.75Z** (0.63kg/m)

Standard Pack: 200 Lengths x 6.100M




40mm Roof Batten*

40 mm ROOF BATTEN - 0.48 BMT - ALUZINC: **40RB0.48Z** (0.66kg/m)

40 mm ROOF BATTEN - 0.55 BMT - ALUZINC: **40RB0.55Z** (0.75kg/m)


Standard Pack: 150 Lengths x 6.100M, 7.500M

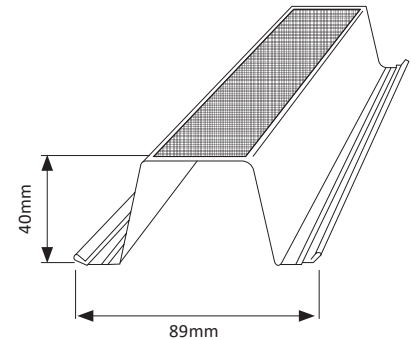

40mm Cyclonic Roof Batten*

40 mm ROOF BATTEN - 0.75 BMT - ALUZINC: **40RB0.75Z** (1.02kg/m)

Standard Pack: 100 Lengths x 6.100M, 7.500M

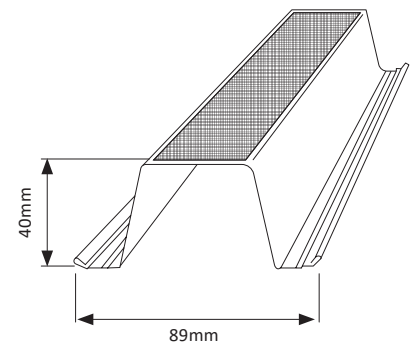

NOTE*: Standard Roof Battens are ANGLE CUT, SQUARE CUT ends would need to be requested.


Junction Stud 0.75

50 x 15 Junction Stud

JUNCTION STUD - 50 X 15 X 0.75 BMT: **JS50150.75** (0.59kg/m)

Standard Pack: 100 Lengths x 6M


Clad Form™
CLADDING SYSTEM

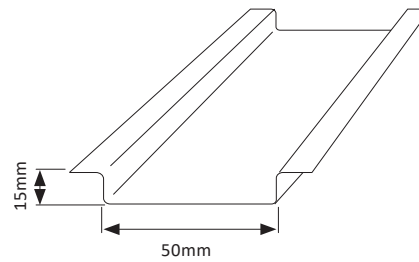

50 x 24 Junction Stud

JUNCTION STUD - 50 X 24 X 0.75 BMT: **JS50240.75** (0.80kg/m)


Standard Pack: 100 Lengths x 6M

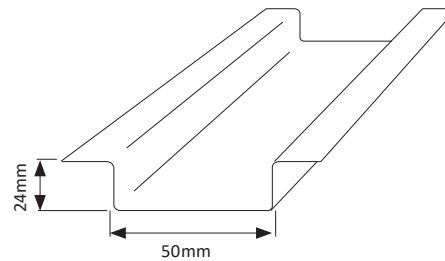

50 x 35 Junction Stud

JUNCTION STUD - 50 X 35 X 0.75 BMT: **JS50350.75** (0.91kg/m)

Standard Pack: 50 Lengths x 6M

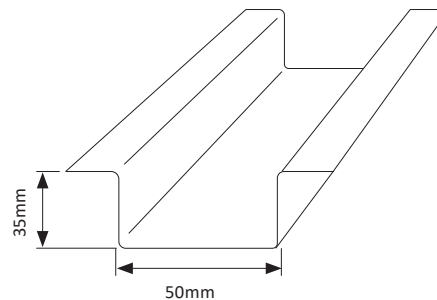

M
MILLFORM
AUSTRALIA

Where strength matters




Junction Stud 0.75

75 x 15 Junction Stud

JUNCTION STUD - 75 X 15 X 0.75 BMT: **JS75150.75** (0.80kg/m)


Standard Pack: 100 Lengths x 6M

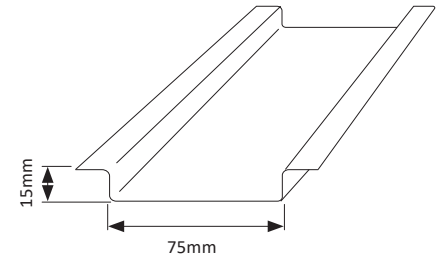

75 x 24 Junction Stud

JUNCTION STUD - 75 X 24 X 0.75 BMT: **JS75240.75** (0.91kg/m)


Standard Pack: 100 Lengths x 6M

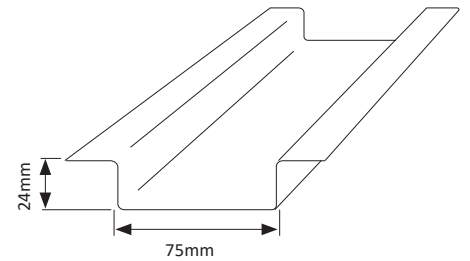

75 x 35 Junction Stud

JUNCTION STUD - 75 X 35 X 0.75 BMT: **JS75350.75** (1.09kg/m)

Standard Pack: 50 Lengths x 6M

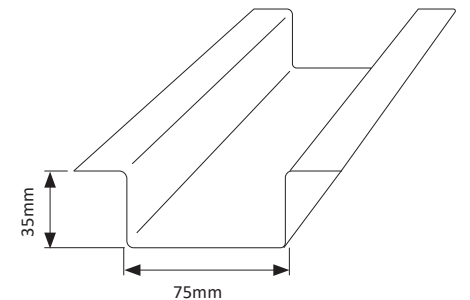


Junction Stud 1.10

50 x 15 Junction Stud

JUNCTION STUD - 50 X 15 X 1.10 BMT: **JS5015** (0.89kg/m)


Standard Pack: 100 Lengths x 6M

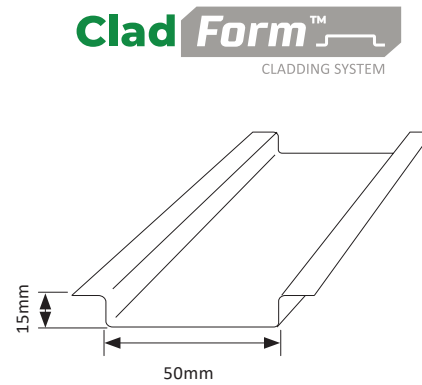

50 x 24 Junction Stud

JUNCTION STUD - 50 X 24 X 1.10 BMT: **JS5024** (1.13kg/m)


Standard Pack: 100 Lengths x 6M

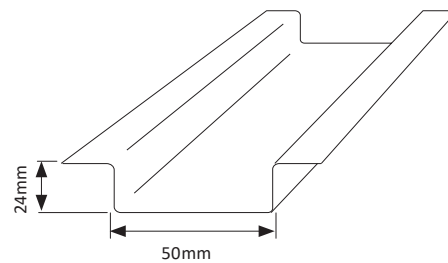

50 x 35 Junction Stud

JUNCTION STUD - 50 X 35 X 1.10 BMT: **JS5035** (1.33kg/m)

Standard Pack: 50 Lengths x 6M

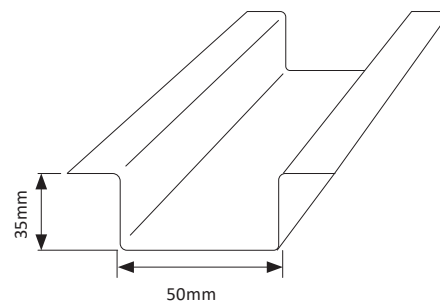

Clad Form™
CLADDING SYSTEM

M
MILLFORM
AUSTRALIA

Where strength matters




Junction Stud 1.10

50 x 50 Junction Stud

JUNCTION STUD - 50 X 50 X 1.10 BMT: **JS5050** (1.56kg/m)


Standard Pack: 50 Lengths x 6M

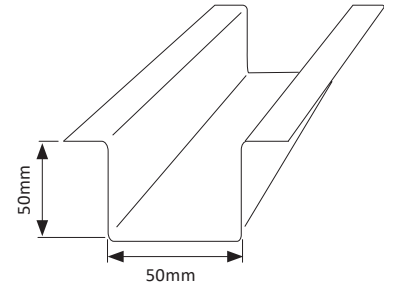

75 x 15 Junction Stud

JUNCTION STUD - 75 X 15 X 1.10 BMT: **JS7515** (1.13kg/m)


Standard Pack: 100 Lengths x 6M

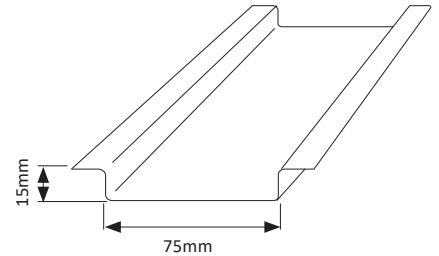

75 x 24 Junction Stud

JUNCTION STUD - 75 X 24 X 1.10 BMT: **JS7524** (1.33kg/m)

Standard Pack: 100 Lengths x 6M

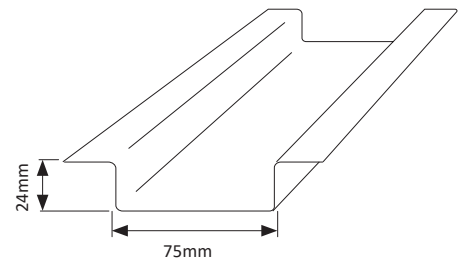

Junction Stud 1.10


Clad Form™
CLADDING SYSTEM

M
MILLFORM
AUSTRALIA

75 x 35 Junction Stud

JUNCTION STUD - 75 X 35 X 1.10 BMT: **JS7535** (1.56kg/m)


Standard Pack: 50 Lengths x 6M

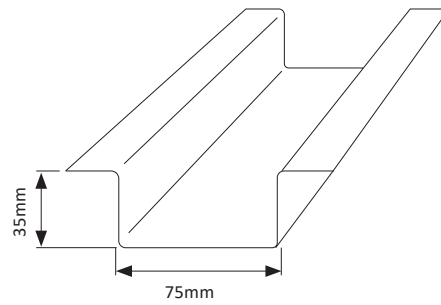

75 x 50 Junction Stud

JUNCTION STUD - 75 X 50 X 1.10 BMT: **JS7550** (1.91kg/m)


Standard Pack: 50 Lengths x 6M

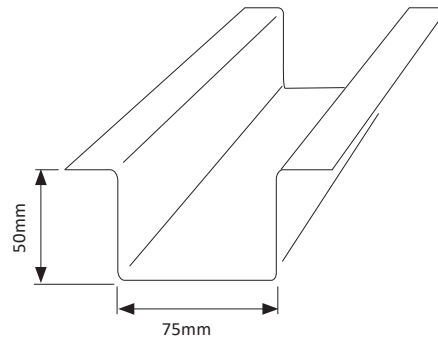

120 x 35 Junction Stud

JUNCTION STUD - 120 X 35 X 1.10 BMT: **JS12035** (1.97kg/m)

Standard Pack: 50 Lengths x 6M

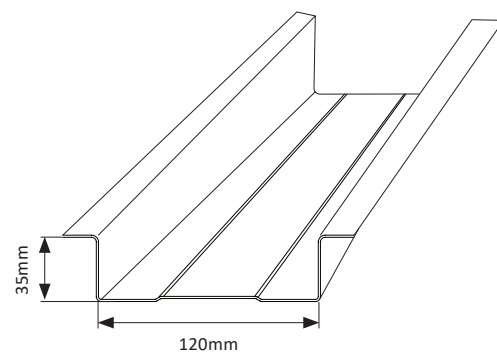

Where strength matters






Facade System

8.0mm Back Flashing

8.0mm X 0.48 BMT BACK FLASHING (BLACK): **8.0MMB-FLA** (0.27kg/m)

Standard Pack: 500 Lengths (Full packs only)

Standard Lengths: 1.190, 2.390, 2.990




3.5mm Back Flashing

3.5mm X 0.48 BMT BACK FLASHING (BLACK): **3.5MMB-FLA** (0.28kg/m)

Standard Pack: 500 Lengths (Full packs only)

Standard Lengths: 1.190, 2.390, 2.990










Trim Angles

0.75 BMT Angle

TRIM ANGLE - 30 X 30 X 0.75 BMT: TA30300.75 (0.35kg/m)
TRIM ANGLE - 35 X 35 X 0.75 BMT: TA35350.75 (0.42kg/m)
TRIM ANGLE - 40 X 40 X 0.75 BMT: TA40400.75 (0.48kg/m)
TRIM ANGLE - 50 X 50 X 0.75 BMT: TA50500.75 (0.59kg/m)
TRIM ANGLE - 65 X 65 X 0.75 BMT: TA65650.75 (0.80kg/m)
TRIM ANGLE - 75 X 75 X 0.75 BMT: TA75750.75 (0.91kg/m)
TRIM ANGLE - 100 X 100 X 0.75 BMT: TA1001000.75 (1.71kg/m)

Standard Pack: 200 Lengths



1.15 BMT Angle

TRIM ANGLE - 30 X 30 X 1.15 BMT: TA30301.15 (0.53kg/m)
TRIM ANGLE - 40 X 40 X 1.15 BMT: TA40401.15 (0.72kg/m)
TRIM ANGLE - 50 X 50 X 1.15 BMT: TA50501.15 (0.90kg/m)
TRIM ANGLE - 65 X 65 X 1.15 BMT: TA65651.15 (1.21kg/m)
TRIM ANGLE - 75 X 75 X 1.15 BMT: TA75751.15 (1.38kg/m)
TRIM ANGLE - 100 X 100 X 1.15 BMT: TA1001001.15 (1.82kg/m)

Standard Pack: 200 Lengths





Trim Angles

2.40 bmt Angle

TRIM ANGLE - 30 X 30 X 2.40 BMT: **TA30302.40** (1.10kg/m)

TRIM ANGLE - 40 X 40 X 2.40 BMT: **TA40402.40** (1.48kg/m)







TRIM ANGLE - 50 X 50 X 2.40 BMT: **TA50502.40** (1.86kg/m)

TRIM ANGLE - 65 X 65 X 2.40 BMT: **TA65652.40** (2.43kg/m)

TRIM ANGLE - 75 X 75 X 2.40 BMT: **TA75752.40** (2.81kg/m)

TRIM ANGLE - 100 X 100 X 2.40 BMT: **TA1001002.40** (3.76kg/m)

Standard Pack: 200 Lengths

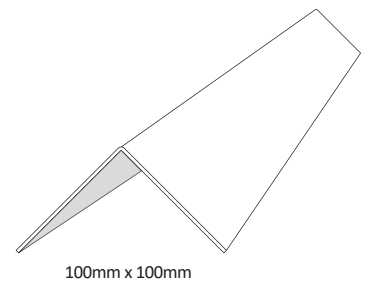

C – Section Archetype Purlin

C75 Purlin


PURLIN - C75 X 0.75 BMT: **C750.75** (1.02kg/m)

PURLIN - C75 X 0.95 BMT: **C750.95** (1.28kg/m)

PURLIN - C75 X 1.20 BMT: **C7512** (1.61kg/m)

PURLIN - C75 X 1.50 BMT: **C7515** (2.00kg/m)

Standard Pack: 50 Lengths



C100 Purlin


PURLIN - C100 X 1.00 BMT: **C10010** (1.64kg/m)

PURLIN - C100 X 1.20 BMT: **C10012** (2.06kg/m)

PURLIN - C100 X 1.50 BMT: **C10015** (2.57kg/m)

PURLIN - C100 X 1.90 BMT: **C10019** (3.24kg/m)

Standard Pack: 50 Lengths



C150 Purlin


PURLIN - C150 X 1.20 BMT: **C15012** (2.83kg/m)

PURLIN - C150 X 1.50 BMT: **C15015** (3.52kg/m)

PURLIN - C150 X 1.90 BMT: **C15019** (4.45kg/m)

PURLIN - C150 X 2.40 BMT: **C15024** (5.60kg/m)

Standard Pack: 50 Lengths



Where strength matters





C – Section Archetype Purlin

C200 Purlin


PURLIN - C200 X 1.20 BMT: **C20012** (3.59kg/m)

PURLIN - C200 X 1.50 BMT: **C20015** (4.47kg/m)

PURLIN - C200 X 1.90 BMT: **C20019** (5.65kg/m)

PURLIN - C200 X 2.40 BMT: **C20024** (7.12kg/m)

Standard Pack: 50 Lengths




C250 Purlin

PURLIN - C250 X 1.50 BMT: **C25015** (5.07kg/m)

PURLIN - C250 X 1.90 BMT: **C25019** (6.41kg/m)

PURLIN - C250 X 2.40 BMT: **C25024** (8.07kg/m)

Standard Pack: 40 Lengths

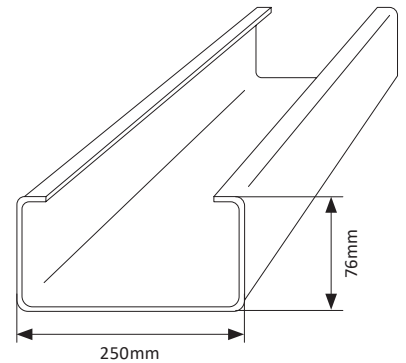


C300 Purlin

PURLIN - C300 X 1.90 BMT: **C30019** (7.91kg/m)

PURLIN - C300 X 2.40 BMT: **C30024** (9.97kg/m)

PURLIN - C300 X 3.00 BMT: **C30030** (12.51kg/m)

Standard Pack: 24 Lengths

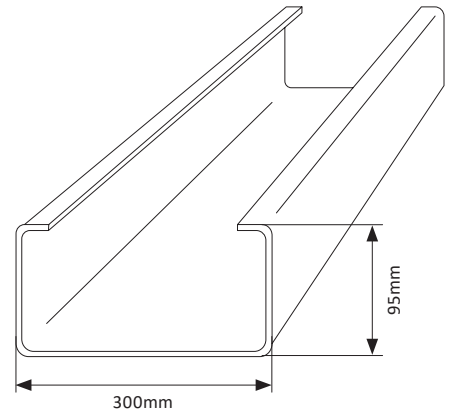

Z – Section Archetype Purlin


Z100 Purlin

Z PURLIN - 100 X 1.20 BMT: **Z10012** (2.06kg/m)

Z PURLIN - 100 X 1.50 BMT: **Z10015** (2.57kg/m)

Z PURLIN - 100 X 1.90 BMT: **Z10019** (3.24kg/m)

Standard Pack: 40 Lengths



Z150 Purlin


Z PURLIN - 150 X 1.20 BMT: **Z15012** (2.83kg/m)

Z PURLIN - 150 X 1.50 BMT: **Z15015** (3.52kg/m)

Z PURLIN - 150 X 1.90 BMT: **Z15019** (4.45kg/m)

Z PURLIN - 150 X 2.40 BMT: **Z15024** (5.60kg/m)

Standard Pack: 20 Lengths

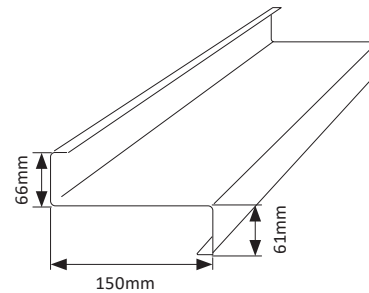

Z200 Purlin


Z PURLIN - 200 X 1.20 BMT: **Z20012** (3.59kg/m)

Z PURLIN - 200 X 1.50 BMT: **Z20015** (4.47kg/m)

Z PURLIN - 200 X 1.90 BMT: **Z20019** (5.65kg/m)

Z PURLIN - 200 X 2.40 BMT: **Z20024** (7.12kg/m)

Standard Pack: 20 Lengths

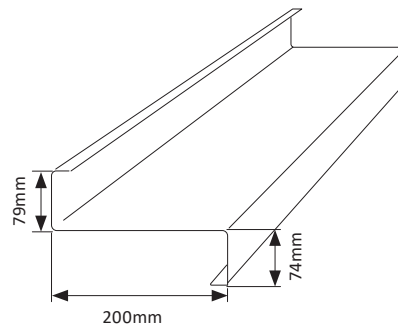


Where strength matters






Z – Section Archetype Purlin

Z250 Purlin
Z PURLIN - 250 X 1.50 BMT: Z25015 (5.07kg/m)
Z PURLIN - 250 X 1.90 BMT: Z25019 (6.41kg/m)
Z PURLIN - 250 X 2.40 BMT: Z25024 (8.07kg/m)
Standard Pack: 20 Lengths

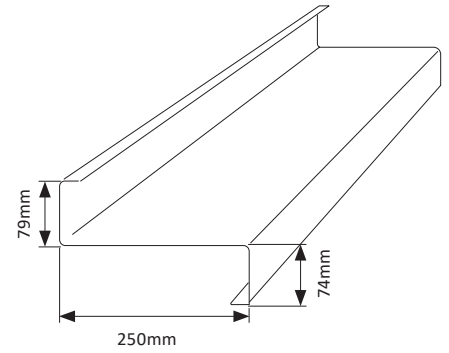


Z300 Purlin
Z PURLIN - 300 X 1.90 BMT: Z30019 (7.91kg/m)
Z PURLIN - 300 X 2.40 BMT: Z30024 (9.97kg/m)
Z PURLIN - 300 X 3.00 BMT: Z30030 (12.51kg/m)
Standard Pack: 20 Lengths

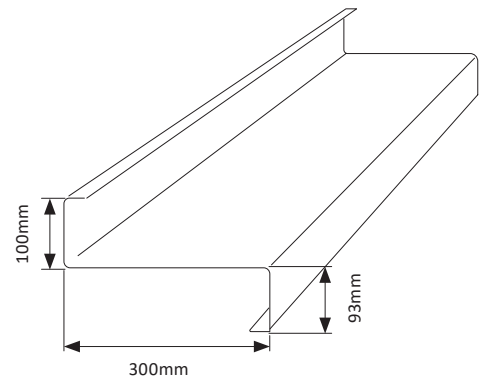


Brackets

Angle Connector Bracket
ANGLE CONNECTOR - C100: MF-AC100 (0.19kg/ea.)
ANGLE CONNECTOR - C150: MF-AC150 (0.30kg/ea.)
ANGLE CONNECTOR - C200: MF-AC200 (0.39kg/ea.)
ANGLE CONNECTOR - C250: MF-AC250 (0.56kg/ea.)
ANGLE CONNECTOR - C300: MF-AC300 (0.69kg/ea.)
Standard Pack: 50 Brackets



Angle Connector Bracket

General Pupose Bracket
GENERAL PURPOSE BRACKET C100: GPB100 (0.23kg/ea.)
GENERAL PURPOSE BRACKET C150: GPB150 (0.41kg/ea.)
GENERAL PURPOSE BRACKET C200: GPB200 (0.61kg/ea.)
GENERAL PURPOSE BRACKET C250: GPB250 (0.80kg/ea.)
GENERAL PURPOSE BRACKET C300: GPB300 (1.00kg/ea.)
Standard Pack: 50 Brackets



General Purpose Bracket



C – Section Extreme Purlin

C150 Purlin


PURLIN - EX_C150 X 58 X 1.20 BMT: **EX_C150_58_1.20G** (2.83kg/m)

PURLIN - EX_C150 X 58 X 1.50 BMT: **EX_C150_58_1.50G** (3.52kg/m)

PURLIN - EX_C150 X 58 X 1.90 BMT: **EX_C150_58_1.90G** (4.45kg/m)

PURLIN - EX_C150 X 58 X 2.40 BMT: **EX_C150_58_2.40G** (5.60kg/m)

Standard Pack: 50 Lengths



C200 Purlin


PURLIN - EX_C200 X 72 X 1.20 BMT: **EX_C200_72_1.20G** (3.59kg/m)

PURLIN - EX_C200 X 72 X 1.50 BMT: **EX_C200_72_1.50G** (4.47kg/m)

PURLIN - EX_C200 X 72 X 1.90 BMT: **EX_C200_72_1.90G** (5.65kg/m)

PURLIN - EX_C200 X 72 X 2.40 BMT: **EX_C200_72_2.40G** (7.12kg/m)

Standard Pack: 50 Lengths




C250 Purlin

PURLIN - EX_C250 X 73 X 1.50 BMT: **EX_C250_73_1.50G** (5.07kg/m)

PURLIN - EX_C250 X 73 X 1.90 BMT: **EX_C250_73_1.90G** (6.41kg/m)

PURLIN - EX_C250 X 73 X 2.40 BMT: **EX_C250_73_2.40G** (8.07kg/m)

Standard Pack: 40 Lengths

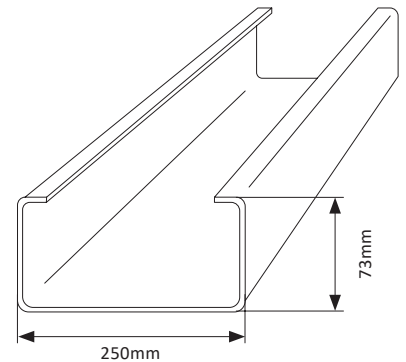


C300 Purlin

PURLIN - EX_C300 X 93 X 1.90 BMT: **EX_C300_93_1.90G** (7.91kg/m)

PURLIN - EX_C300 X 93 X 2.40 BMT: **EX_C300_93_2.40G** (9.97kg/m)

PURLIN - EX_C300 X 93 X 3.00 BMT: **EX_C300_93_3.00G** (12.51kg/m)

Standard Pack: 20 Lengths

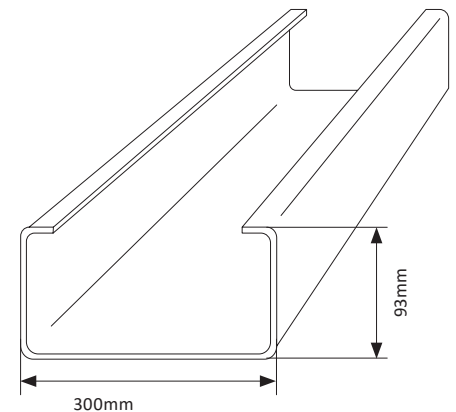

Z – Section Extreme Purlin

Z150 Purlin


PURLIN - EX_Z150 X 58 X 1.20 BMT: **EX_Z150_58_1.20G** (2.83kg/m)

PURLIN - EX_Z150 X 58 X 1.50 BMT: **EX_Z150_58_1.50G** (3.52kg/m)

PURLIN - EX_Z150 X 58 X 1.90 BMT: **EX_Z150_58_1.90G** (4.45kg/m)

PURLIN - EX_Z150 X 58 X 2.40 BMT: **EX_Z150_58_2.40G** (5.60kg/m)

Standard Pack: 20 Lengths



Z200 Purlin


PURLIN - EX_Z200 X 72 X 1.20 BMT: **EX_Z200_72_1.20G** (3.59kg/m)

PURLIN - EX_Z200 X 72 X 1.50 BMT: **EX_Z200_72_1.50G** (4.47kg/m)

PURLIN - EX_Z200 X 72 X 1.90 BMT: **EX_Z200_72_1.90G** (5.65kg/m)

PURLIN - EX_Z200 X 72 X 2.40 BMT: **EX_Z200_72_2.40G** (7.12kg/m)

Standard Pack: 20 Lengths

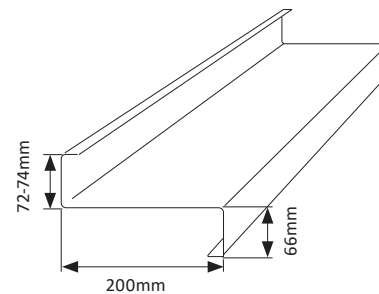


Z250 Purlin

PURLIN - EX_Z250 X 73 X 1.50 BMT: **EX_Z250_73_1.50G** (5.07kg/m)

PURLIN - EX_Z250 X 73 X 1.90 BMT: **EX_Z250_73_1.90G** (6.41kg/m)

PURLIN - EX_Z250 X 73 X 2.40 BMT: **EX_Z250_73_2.40G** (8.07kg/m)

Standard Pack: 20 Lengths

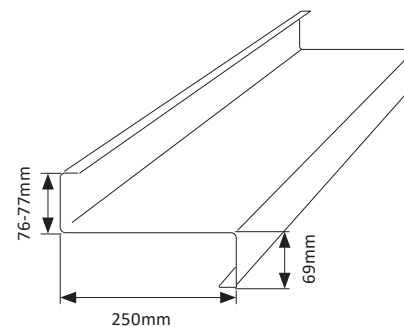


Z300 Purlin

PURLIN - EX_Z300 X 93 X 1.90 BMT: **EX_Z300_93_1.90G** (7.91kg/m)

PURLIN - EX_Z300 X 93 X 2.40 BMT: **EX_Z300_93_2.40G** (9.97kg/m)

PURLIN - EX_Z300 X 93 X 3.00 BMT: **EX_Z300_93_3.00G** (12.51kg/m)

Standard Pack: 20 Lengths

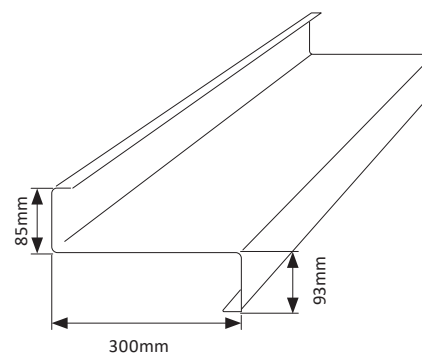

Where strength matters





Channels


101 ID Channel

CHANNEL - 101 ID X 63 X 1.2 BMT GAL: **CH10112** (2.06kg/m)

CHANNEL - 101 ID X 63 X 1.5 BMT GAL: **CH10115** (2.57kg/m)

CHANNEL - 101 ID X 63 X 1.9 BMT GAL: **CH10119** (3.24kg/m)

Standard Pack: 50 Lengths




121 ID Channel

CHANNEL - 121 ID X 53 X 1.2 BMT GAL: **CH12112** (2.06kg/m)

CHANNEL - 121 ID X 53 X 1.5 BMT GAL: **CH12115** (2.57kg/m)

CHANNEL - 121 ID X 53 X 1.9 BMT GAL: **CH12119** (3.24kg/m)

Standard Pack: 50 Lengths




151 ID Channel

CHANNEL - 151 ID X 78 X 1.2 BMT GAL: **CH15112** (2.83kg/m)

CHANNEL - 151 ID X 78 X 1.5 BMT GAL: **CH15115** (3.52kg/m)

CHANNEL - 151 ID X 78 X 1.9 BMT GAL: **CH15119** (4.45kg/m)

Standard Pack: 50 Lengths



Channels


201 ID Channel

CHANNEL - 201 ID X 93 X 1.5 BMT GAL: **CH20115** (4.47kg/m)

CHANNEL - 201 ID X 93 X 1.9 BMT GAL: **CH20119** (5.65kg/m)

CHANNEL - 201 ID X 93 X 2.4 BMT GAL: **CH20124** (7.12kg/m)

Standard Pack: 50 Lengths




251 ID Channel

CHANNEL - 251 ID X 68 X 1.9 BMT GAL: **CH25119** (5.65kg/m)

CHANNEL - 251 ID X 68 X 2.4 BMT GAL: **CH25124** (7.12kg/m)


Standard Pack: 40 Lengths

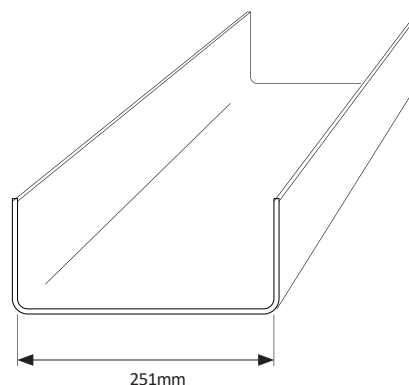

301 ID Channel

CHANNEL - 301 ID X 68 X 2.4 BMT GAL: **CH30124** (8.07kg/m)

Standard Pack: 40 Lengths

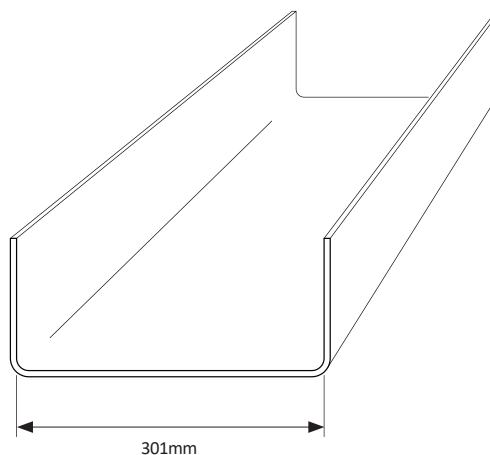

Where strength matters




Hook Fast Purlin Bridging

Millform *HookFast*® Bridging System


(available to suit C/Z100, 150, 200 & 250)

HookFast®
BRIDGING SYSTEM


AdJ Starter – Adjustable Female / Fascia Cleat




Starter – Bolted / Female

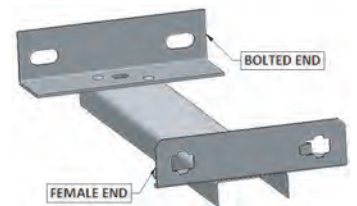


Intermediate – Male / Female



Finisher – Male / Bolted

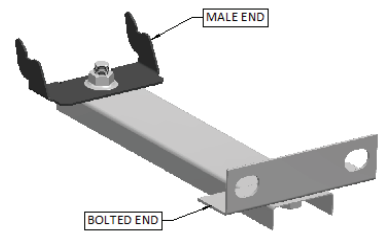

12 mm Sag Rod Ridge Tie (add 100 mm to centres)

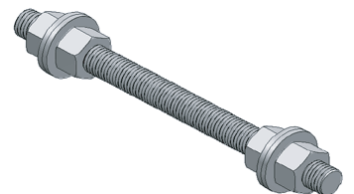

Steel Framing




52mm Stud Range

PLATE - 54 X 20 X 1.15 BMT - ALUZINC: **PL54201.15Z** (0.90kg/m)

STUD - 52 X 21 X 1.15 BMT - ALUZINC: **S52211.15Z** (0.90kg/m)

NOGGIN - 50 X 22 X 1.15 BMT - ALUZINC: **N50221.15Z** (0.90kg/m)

Standard Pack: 100 Lengths




65mm Stud Range

PLATE - 68 X 33 X 1.15 BMT - ALUZINC: **PL68331.15Z** (1.21kg/m)

STUD - 65 X 35 X 1.15 BMT - ALUZINC: **S65351.15Z** (1.21kg/m)

NOGGIN - 62 X 37 X 1.15 BMT - ALUZINC: **N62371.15Z** (1.21kg/m)

Standard Pack: 100 Lengths




75mm Stud Range

PLATE - 78 X 28 X 1.15 BMT - ALUZINC: **PL78281.15Z** (1.21kg/m)

STUD - 75 X 30 X 1.15 BMT - ALUZINC: **S75301.15Z** (1.21kg/m)

NOGGIN - 72 X 32 X 1.15 BMT - ALUZINC: **N72321.15Z** (1.21kg/m)

Standard Pack: 100 Lengths

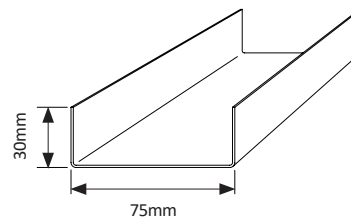

Where strength matters





Steel Framing


90mm Stud Range

PLATE - 93 X 30 X 1.15 BMT - ALUZINC: **PL93301.15Z** (1.38kg/m)

STUD - 90 X 31 X 1.15 BMT - ALUZINC: **S90311.15Z** (1.38kg/m)

NOGGIN - 87 X 32 X 1.15 BMT - ALUZINC: **N87321.15Z** (1.38kg/m)

Standard Pack: 100 Lengths

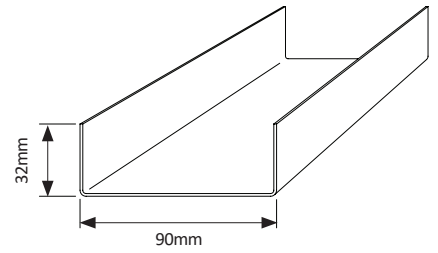


100mm Stud Range

PLATE - 103 X 38 X 1.15 BMT - ALUZINC: **PL103381.15Z** (1.63kg/m)

STUD - 100 X 40 X 1.15 BMT - ALUZINC: **S100401.15Z** (1.63kg/m)

NOGGIN - 97 X 42 X 1.15 BMT - ALUZINC: **N97421.15Z** (1.63kg/m)

Standard Pack: 100 Lengths

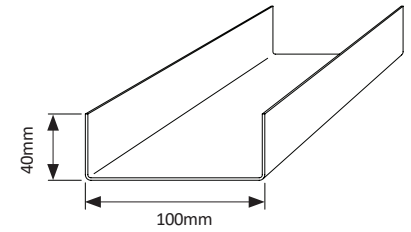


Steel Framing

78 Stiffened Top Plate

STIFFENED TOP PLATE 78 MM X 1.15 BMT ALUZINC: **STP781.15Z** (1.91kg/m)

STIFFENED TOP PLATE 78 MM X 1.50 BMT ALUZINC: **STP781.50Z** (2.57kg/m)

Standard Pack: 50 Lengths x 7.500M




92 Stiffened Top Plate

STIFFENED TOP PLATE 92 MM X 1.15 BMT ALUZINC: **STP921.15Z** (2.14kg/m)

STIFFENED TOP PLATE 92 MM X 1.50 BMT ALUZINC: **STP921.50Z** (2.57kg/m)

Standard Pack: 50 Lengths x 7.500M

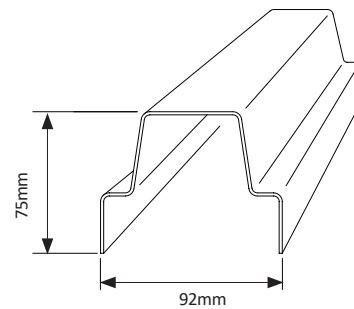


78 High Wall Plate

H.W.PLATE - 78 X 50 X 1.15 BMT - ALUZINC: **HWPL78501.15Z** (1.63kg/m)

H.W.PLATE - 78 X 50 X 1.50 BMT - GAL: **HWPL78501.50G** (2.15kg/m)

Standard Pack: 50 Lengths




93 High Wall Plate

H.W.PLATE - 93 X 50 X 1.15 BMT - ALUZINC: **HWPL93501.15Z** (1.63kg/m)

H.W.PLATE - 93 X 50 X 1.50 BMT - Gal: **HWPL93501.50G** (2.17kg/m)

Standard Pack: 50 Lengths x 7.500M

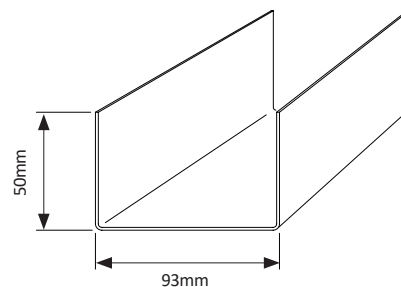

Where strength matters





Cyclonic Steel Framing


75mm Cyclonic Stud Range

PLATE - 78 X 38 X 1.50 BMT - ALUZINC: **PL78381.50Z** (1.81kg/m)

STUD - 75 X 40 X 1.50 BMT - ALUZINC: **S75401.50Z** (1.81kg/m)

NOGGIN - 72 X 42 X 1.50 BMT - ALUZINC: **N72421.50Z** (1.81kg/m)

Standard Pack: 100 Lengths




90mm Cyclonic Stud Range

PLATE - 93 X 30 X 1.50 BMT - ALUZINC: **PL93301.50Z** (1.81kg/m)

STUD - 90 X 31 X 1.50 BMT - ALUZINC: **S90311.50Z** (1.81kg/m)

NOGGIN - 87 X 32 X 1.50 BMT - ALUZINC: **N87321.50Z** (1.82kg/m)

Standard Pack: 100 Lengths




100mm Cyclonic Stud Range

PLATE - 103 X 38 X 1.50 BMT - ALUZINC: **PL103381.50Z** (2.15kg/m)

STUD - 100 X 40 X 1.50 BMT - ALUZINC: **S100401.50Z** (2.15kg/m)


NOGGIN - 97 X 42 X 1.50 BMT - ALUZINC: **N97421.50Z** (2.15kg/m)

Standard Pack: 100 Lengths



CorroForm - Corrugated Sheet Metal

MATERIAL PROPERTIES	FINISH	0.35 BMT	0.42 BMT	0.48 BMT
Total Coated Thickness (TCT) mm	Zinc	0.40	0.47	0.53
	Colour	0.43	0.50	0.56
Mass (kg/linear metre)	Zinc	2.74	3.26	3.70
	Colour	2.79	3.32	3.76
Mass (kg/square metre)	Zinc	3.60	4.28	4.86
	Colour	3.67	4.35	4.93
Yield (square metre/tonne)	Zinc	277.9	233.8	205.9
	Colour	272.3	229.8	202.8
Tensile Strength (MPa)	Zinc & Colour	550	550	550
Width Coverage (mm)	Zinc & Colour	762	762	762
Sheet Tolerances (mm)	Width & Length	±5 ±2	±5 ±2	±5 ±2
Minimum Roof Pitch	Zinc & Colour	N/A	5°	5°

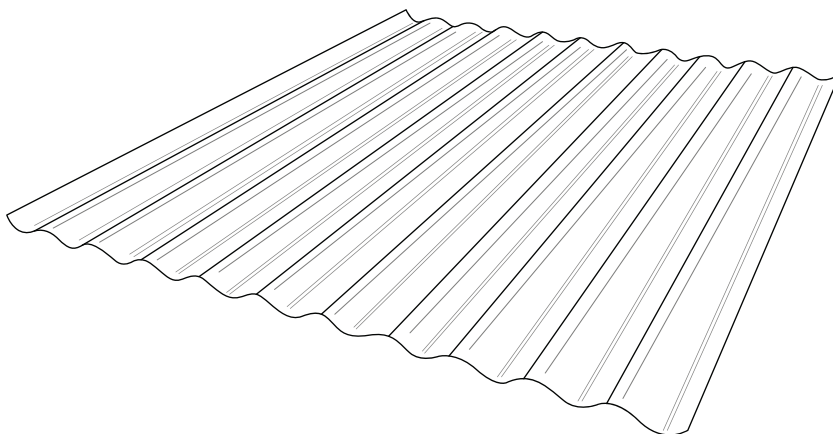


Where strength matters



RibForm - Corrugated Sheet Metal

MATERIAL PROPERTIES	FINISH	0.35 BMT	0.42 BMT	0.48 BMT
Total Coated Thickness (TCT) mm	Zinc	0.40	0.47	0.53
	Colour	0.43	0.50	0.56
Mass (kg/linear metre)	Zinc	2.74	3.26	3.70
	Colour	2.79	3.32	3.76
Mass (kg/square metre)	Zinc	3.60	4.28	4.86
	Colour	3.67	4.35	4.93
Yield (square metre/tonne)	Zinc	277.9	233.8	205.9
	Colour	272.3	229.8	202.8
Tensile Strength (MPa)	Zinc & Colour	550	550	550
Width Coverage (mm)	Zinc & Colour	762	762	762
Sheet Tolerances (mm)	Width & Length	±5 ±2	±5 ±2	±5 ±2
Minimum Roof Pitch	Zinc & Colour	N/A	2°	2°

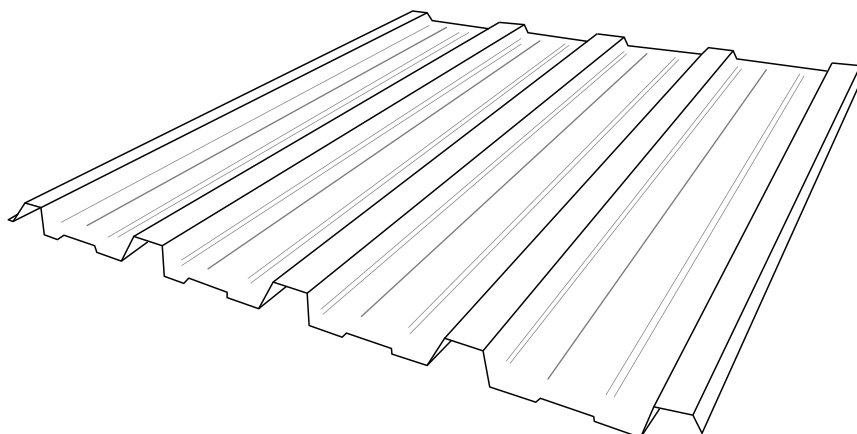


Slab and Spiral Duct

DUCTING FOR THE POST TENSION CONCRETE INDUSTRY

Quality Galvanised Steel Prevents Ducting Corrosion

SPIRAL DUCT


RANGE: Ø 40 MM I.D - Ø 175 MM I.D

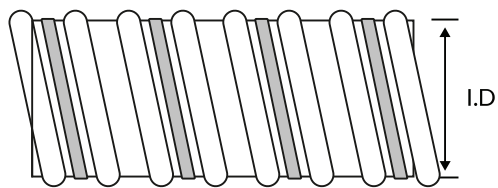


SPIRAL DUCT
0.30 BMT



SLAB DUCT

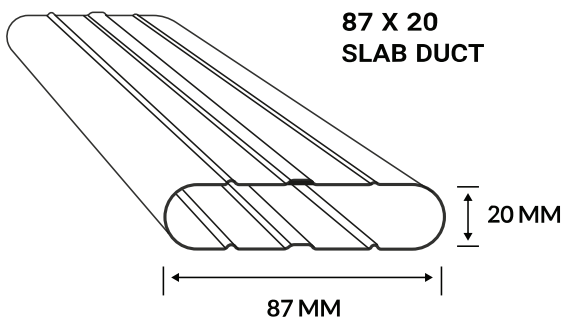

87 X 20
SLAB DUCT

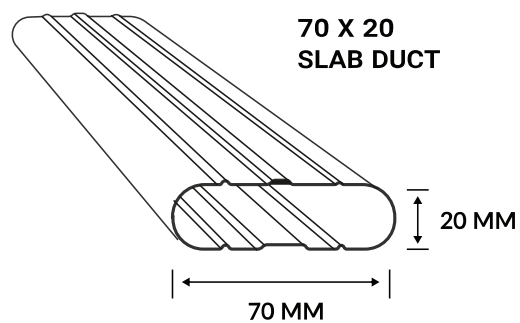


70 X 20
SLAB DUCT

Where strength matters



FIND OUT MORE ABOUT OUR RANGE OF
STEEL BUILDING PRODUCTS

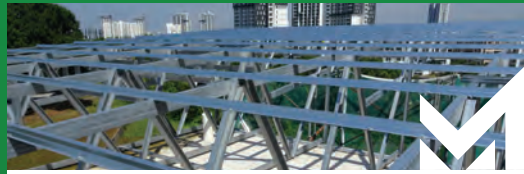

TOPHAT & BATTENS



PURLIN & CHANNEL



HOOKFAST PURLIN BRIDGING SYSTEM



ROOFING & WALLING



ROOFING ACCESSORIES



JUNCTION STUD & FACADE SYSTEM



SLAB & SPIRAL DUCT

MILLFORM OFFICE & MANUFACTURING FACILITY

Sydney

22 Shale Place, Eastern Creek, NSW, 2766
Ph. (02) 9832 6900

Albury

101 Ceres Drive, Albury, NSW 2640
Ph. (02) 6025 4377

REGIONAL SALES TEAMS

QLD, NSW, ACT, VIC, TAS, WA, NT

**FOR SALES AND INFORMATION ENQUIRIES, CONTACT OUR
KNOWLEDGEABLE TEAM**

Call: **1300 645 376** or email: enquiries@millform.com.au

www.millform.com.au

Version 2.2

All reasonable care has been taken to present accurate information at the time of publication. All recommendations related to the use of Millform products are made without a guarantee. Many factors are beyond our control, and all information presented is meant as a guide only. It is the customer's responsibility to ensure that all products are suitable for their intended purpose. Millform reserves the right to change product specifications and recommendations at any time without prior notice. The Millform logo is registered and protected under Australian law.

